



MODELO: AFD 9127

Faros para aplicación de quitanieves (Conducción por el lado izquierdo)



SPECIFICATIONS:

FUNCTION	POWER	LIGHT OUTPUT	APPROVAL
Low beam	30W	2250 lumens	E9 R149 certified
High beam	90W	6300 lumens	E9 R149 certified
Front position(DRL)	24W	—	E9 R148 certified
Front direction	7W	—	E9 R148 certified
Side direction	6W	—	E9 R148 certified
Whole lamp	—	—	E-mark R10 & DOT
Voltage range:		9-32V DC	
Waterproof rate:		IP68	
Material:		Glass	
Operating temperature:		-45°C-+85°C	
Material of housing:		aluminum alloy	
Weight:		4.9 pounds	
With Heated Lens		Up/Down tiltable	
DT connector 6 Pins		1 bolt mounting	




Adjust the upward and downward angles, and 360-degree rotation to adjust the angle

There are heating wires inside the glass cover, which eliminates ice/snow accumulation through the heating wires.

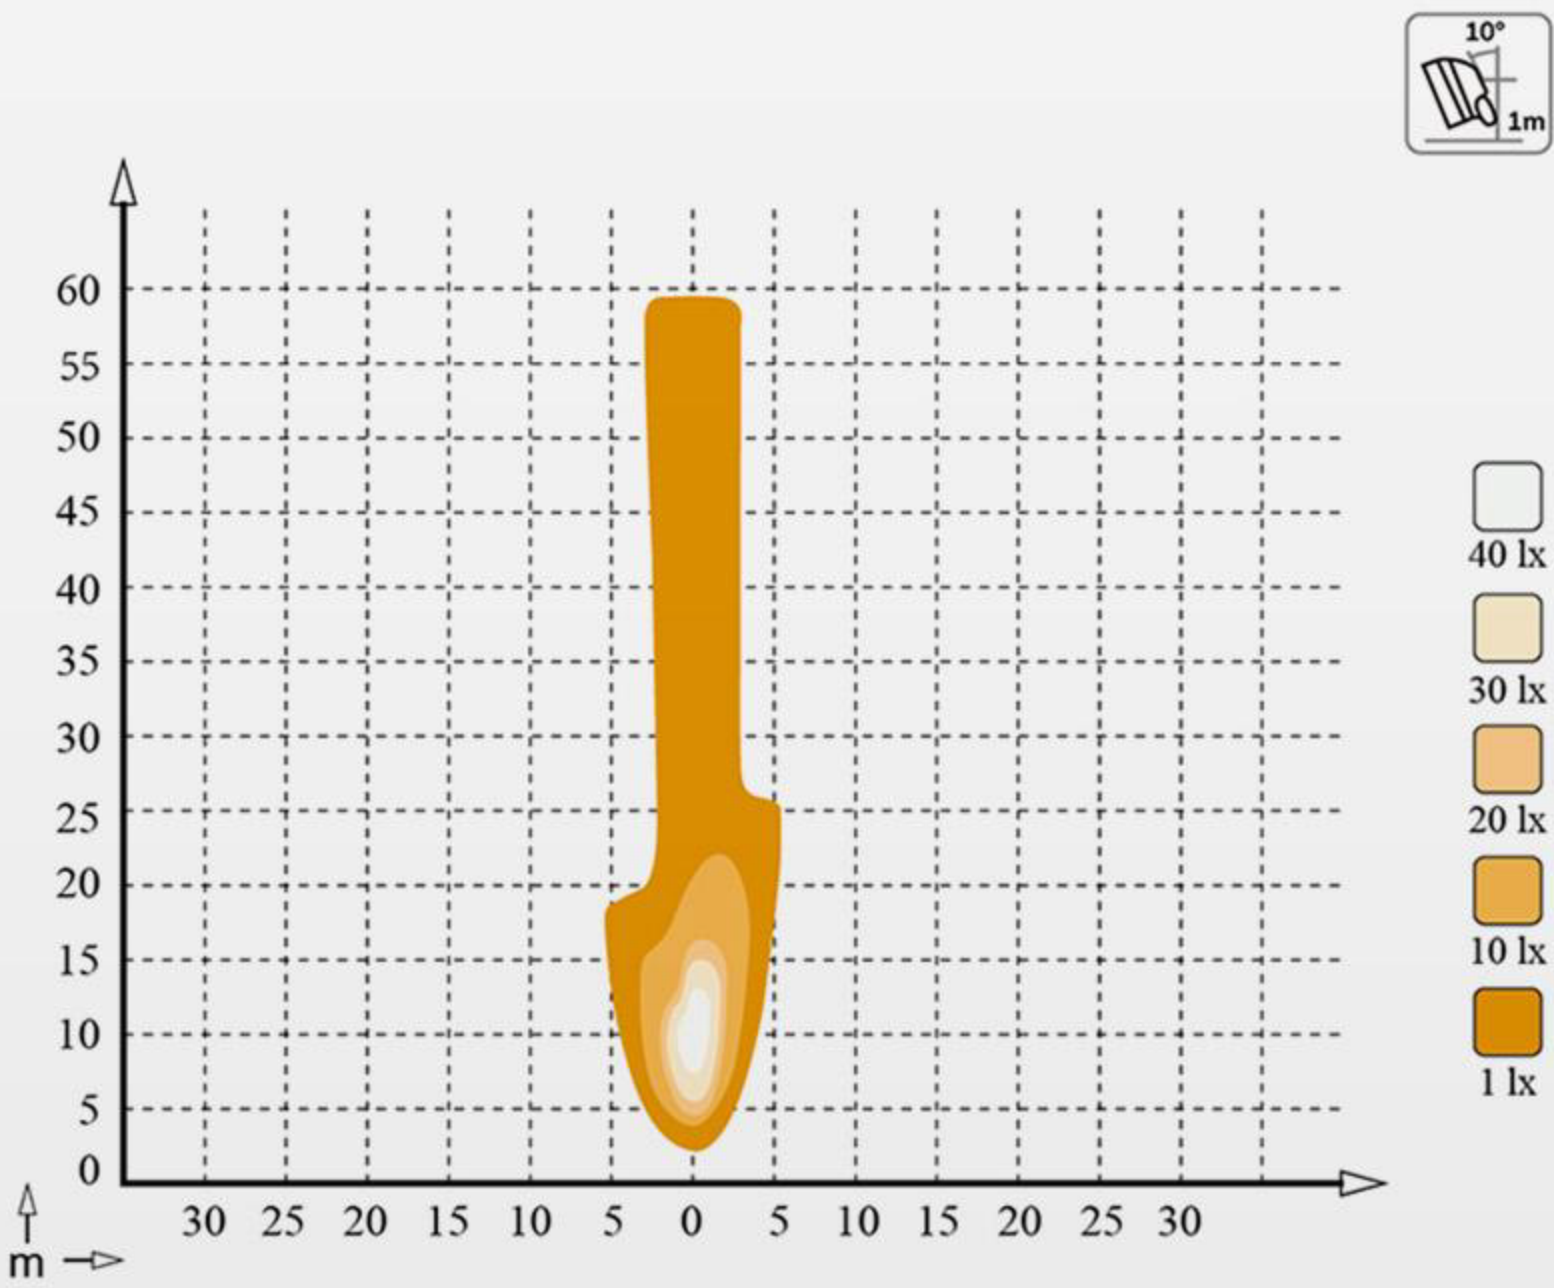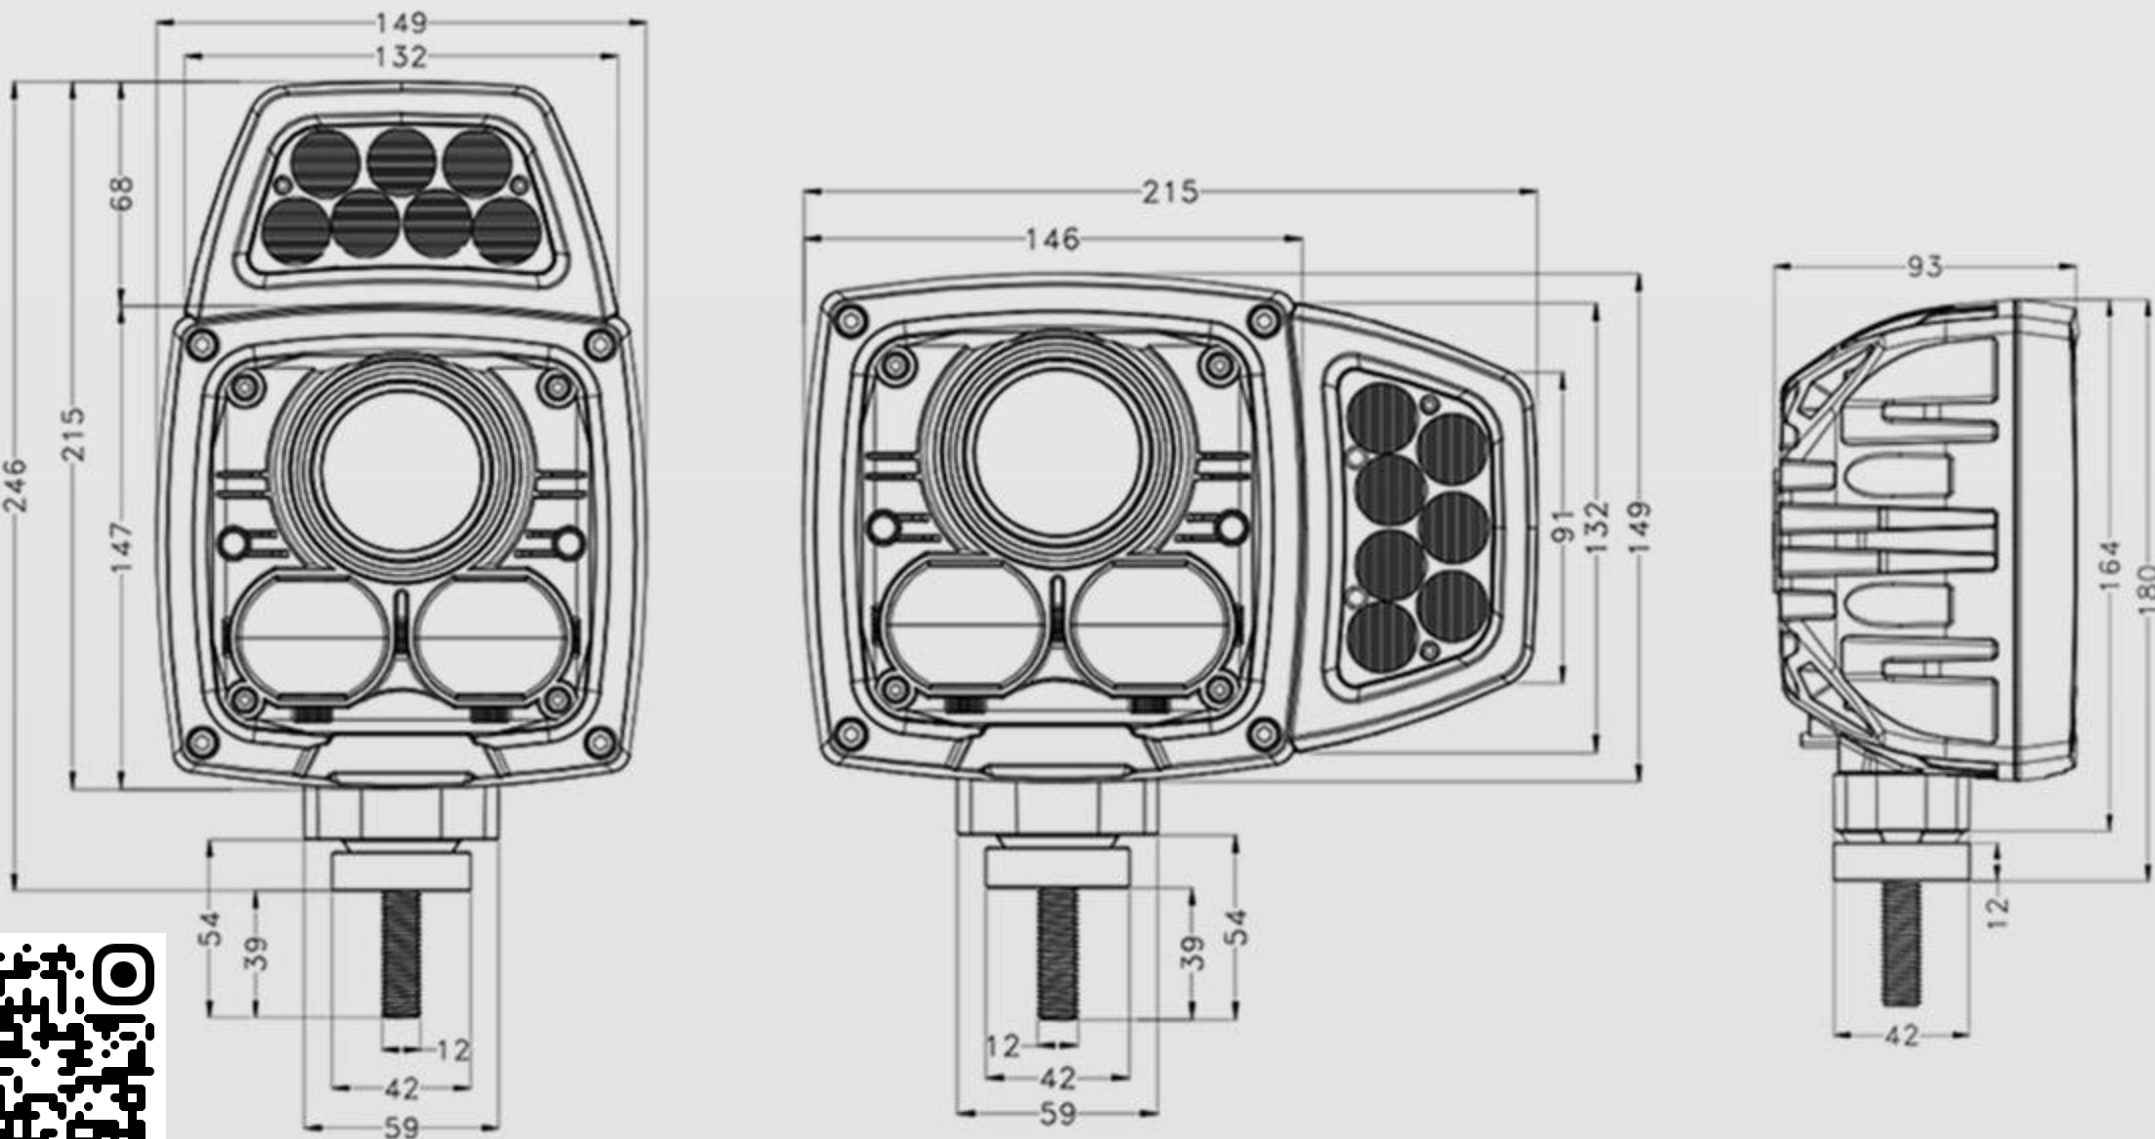

high beam

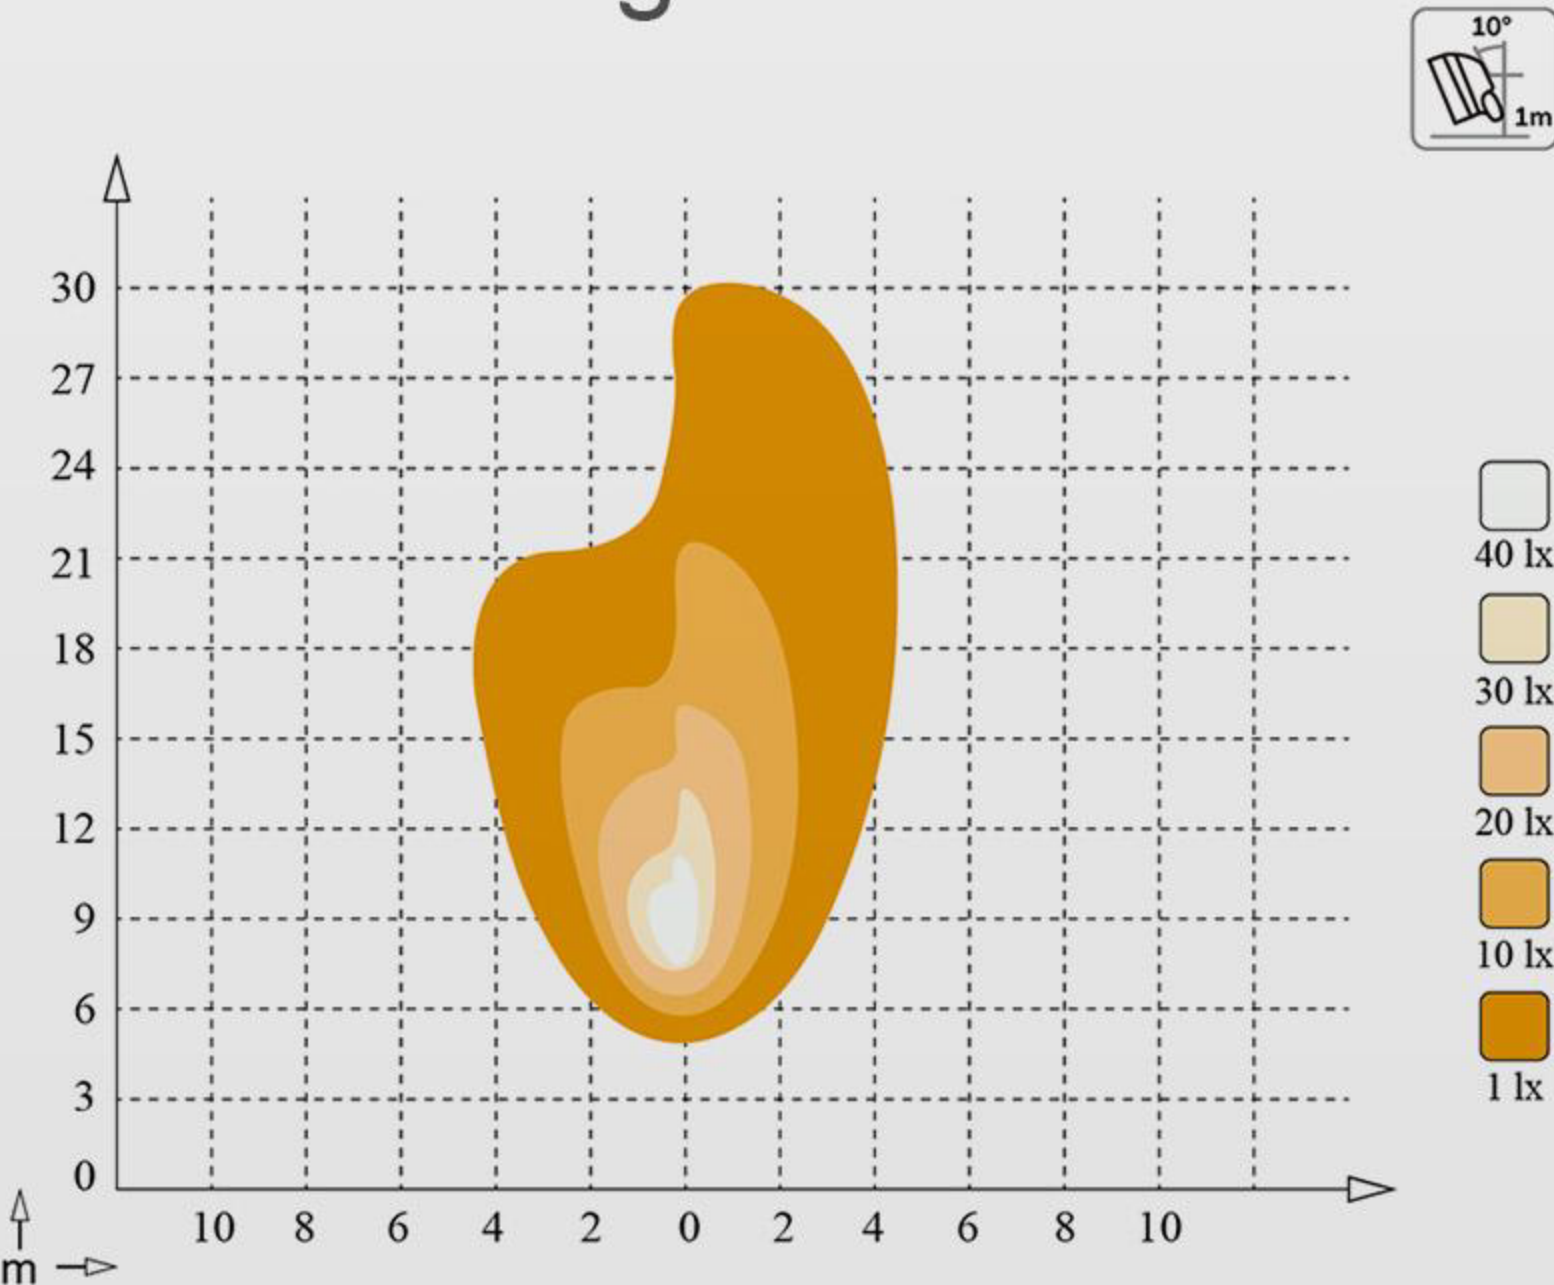

low beam

