


## HERRAMIENTA CRIMPADO PIN SOLIDO TERMINALES DT- DTM - DTP - HD / AFD4800T





# AFD & PRESENTACION S.A.C

7		6		5		4		3		2		1				
SOLID CONTACT PART NUMBER	SIZE TYPE	WIRE SIZE AWG [mm <sup>2</sup> ]	REF. ONLY CRIMP TENSILE LBS [N]	RECOMMENDED STRIP LENGTH INCH [mm]	CONTACT IDENTIFICATION INFO & NOTES	REV M2	HDT-48-00	REVISIONS								
								SYM	DESCRIPTION	DATE	APPROVED					
0460-204-12**	12 PIN	12 AWG	75 [334]	.222-.284 [5.64-7.21]	0462-215-12** MARKING 1 GRAY BAND, NARROW 1 BROWN BAND, NARROW 1 BROWN BAND, BROAD	M2	ECR-17-018412	12/2017	CM							
0460-211-12**	12 PIN	3.0 mm <sup>2</sup>														
0460-220-12**	12 PIN	3.0 mm <sup>2</sup>														
0460-235-12**	12 PIN	2.5 mm <sup>2</sup>														
0460-258-12**	12 PIN	12 AWG	70 [311]													
0462-203-12**	12 SOC	14 AWG	70 [311]													
0462-210-12**	12 SOC	2.0 mm <sup>2</sup>														
0462-214-12**	12 SOC															
0462-215-12**	12 SOC															
0460-256-12**	12 PIN	1.5 mm <sup>2</sup> 16 AWG 1.0 mm <sup>2</sup>	35 [156]	.222-.284 [5.64-7.21]												
		18 AWG 0.75 mm <sup>2</sup>	25 [111]													
0460-215-16**	16 PIN	14 AWG	70 [311]	.250-.312 [6.35-7.92]	1 GREEN BAND, BROAD											
0462-209-16**	16 SOC	2.0 mm <sup>2</sup>			1 GREEN BAND, BROAD											
0460-002-16**	16 PIN	1.5 mm <sup>2</sup>	35 [156]	.250-.312 [6.35-7.92]	2325529-1 MARKING 3 BROWN BANDS 2325584-1 MARKING 2 BROWN BANDS 1 BLUE BAND 0460-002-1631 AND 0462-004-1631 MARKING 1 BLUE BAND, BROAD											
0460-202-16**	16 PIN	16 AWG														
0460-211-16**	16 PIN	1.0 mm <sup>2</sup>														
0460-230-16**	16 PIN															
0460-235-16**	16 PIN															
0460-247-16**	16 PIN															
2325529-1	16 PIN															
0462-004-16**	16 SOC	18 AWG	25 [111]													
0462-007-16**	16 SOC	0.75 mm <sup>2</sup>														
0462-201-16**	16 SOC															
0462-214-16**	16 SOC															
0462-221-16**	16 SOC															
0462-222-16**	16 SOC	20 AWG	20 [89]													
2325584-1	16 SOC	0.50 mm <sup>2</sup>														
0462-001-16**	16 SOC	16 AWG	35 [156]	.250-.312 [6.35-7.92]	1 BLUE BAND, NARROW											
		1.0 mm <sup>2</sup>														
0462-223-16**	16 SOC	1.5 mm <sup>2</sup> 16 AWG 1.0 mm <sup>2</sup>	35 [156]	.117-.237 [4.49-6.02]	USE 2.0 mm <sup>2</sup> DIAL SET											
0460-010-20**	20 PIN	16 AWG	20 [89]	.156-.218 [3.96-5.54]	1 PURPLE BAND, BROAD											
0462-005-20**	20 SOC	1.00 mm <sup>2</sup> 18 AWG 0.75 mm <sup>2</sup>														
2325531-1	20 PIN	20 AWG	20 [89]	.156-.218 [3.96-5.54]	2325531-1 MARKING 2 BROWN BANDS 1 BLACK BAND 2325530-1 MARKING 2 BROWN BANDS 1 GREEN BAND											
0460-202-20**	20 PIN	0.50 mm <sup>2</sup>														
0462-201-20**	20 SOC															
2325530-1	20 SOC	22 AWG	10 [44]													
		0.35 mm <sup>2</sup>														
112349	12 PIN	12 AWG	75 [334]	.222-.284 [5.64-7.21]	SLOTTED (SPLIT) PIN											
112352	12 SOC	3.0 mm <sup>2</sup> 2.5 mm <sup>2</sup>														
		14 AWG	70 [311]													
		2.0 mm <sup>2</sup>														
0460-201-1690	16 PIN	1.5 mm <sup>2</sup> 16 AWG 1.0 mm <sup>2</sup>	35 [156]	.222-.284 [5.64-7.21]	SLOTTED (SPLIT) PIN											
0461-201-1690	16 SOC	18 AWG	25 [111]													
		0.75 mm <sup>2</sup>														
8960-025-12603	12 PIN	4.0 mm <sup>2</sup>	75 [334]	.222-.284 [5.64-7.21]												
8962-014-12603	12 SOC	12 AWG														
		3.0 mm <sup>2</sup> 2.5 mm <sup>2</sup>														
8960-020-16603	16 PIN	1.5 mm <sup>2</sup> 16 AWG 1.0 mm <sup>2</sup>	35 [156]													
8962-011-16603	16 SOC	18 AWG	25 [111]	.250-.312 [6.35-7.92]												
		0.75 mm <sup>2</sup>														
		20 AWG	20 [89]													
		0.50 mm <sup>2</sup>														

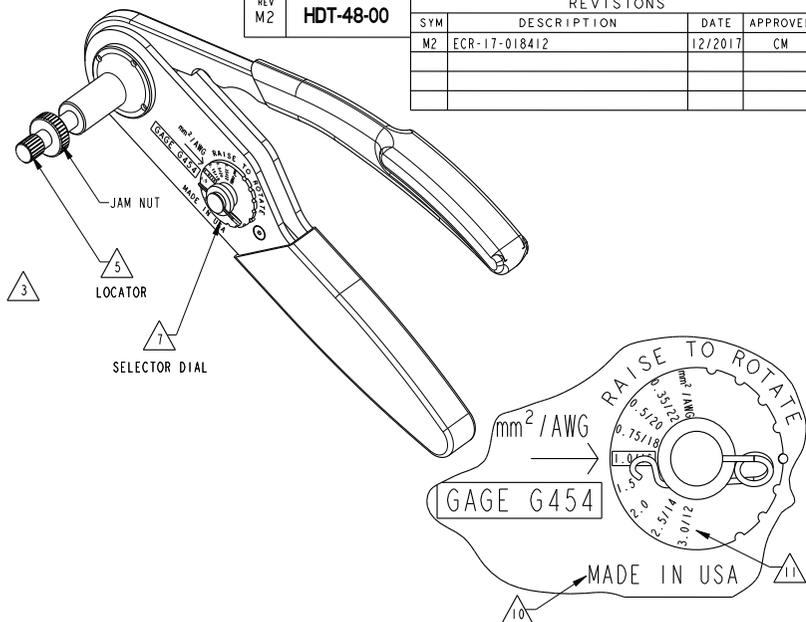

SOLID CONTACT PART NUMBER	SIZE TYPE	WIRE SIZE AWG [mm <sup>2</sup> ]	REF. ONLY CRIMP TENSILE LBS [N]	RECOMMENDED STRIP LENGTH INCH [mm]	CONTACT IDENTIFICATION INFO & NOTES
4060-002-12**	12 PIN	12 AWG	75 [334]	.250-.312 [6.35-7.92]	3 4
4062-002-12**	12 SOC	3.0 mm <sup>2</sup> 2.5 mm <sup>2</sup>			
		14 AWG	70 [311]		
		2.0 mm <sup>2</sup>			
4060-001-16**	16 PIN	1.5 mm <sup>2</sup> 16 AWG	35 [156]	.240-.302 [6.10-7.67]	
4062-001-16**	16 SOC	1.0 mm <sup>2</sup> 0.75 mm <sup>2</sup>	25 [111]		

- 11 USE 3.0/12 SETTING FOR THIS PART WITH 4.0mm<sup>2</sup>.
- 10 COUNTRY OF ORIGIN "MADE IN USA" SHOWN AS EXAMPLE.
- 9. SEE 0425-071-0000 INSTRUCTION GUIDE, SHIPPED WITH TOOL.
- 8. OVERALL TOOL LENGTH IS APPROXIMATELY 9.90 [251.46].
- 7 CYCLE TOOL TO OPEN HANDLES. REMOVE LOCK CLIP. RAISE AND ROTATE DIAL TO SELECT WIRE SIZE. REPLACE LOCK CLIP.
- 6 WHEN \*\*= 31, PLATING IS GOLD. WHEN \*\*=141, PLATING IS NICKEL.

A **△** DEPTH ADJUSTING SCREW P/N 0426-209-0000 INCLUDES JAM NUT.  
**△** USE 2.5/14 SETTING FOR THIS PART WITH 12 AWG.  
**△** USE 1.5 SETTING FOR THIS PART WITH 14 AWG.  
**△** CAUTION: NEVER CLOSE TOOL ON GAGE G454. CLOSE TOOL FIRST AND THEN INSERT GAGE.  
**△** USE **GAGE G454** IN DIAL POSITION **1.0/16** TO CHECK WEAR ANNUALLY. CHECK OFTEN IF USED FOR FREQUENT CRIMPING.  
 NOTES: UNLESS OTHERWISE SPECIFIED

SIGNATURE & DATE		TOOL, HAND CRIMP FOR SIZE 20, 16 & 12 SOLID CONTACTS		EP	MFL CODE
DR	J.APOSTOL 21FEB2007			3850 INDUSTRIAL AVE. HEMET, CA 92545	
CHK				DEUTSCH INDUSTRIAL	
PE				C HDT-48-00	
APPD				DWG SIZE CODE PARTS SHEET 1 OF 1	
SCALE NONE	WT	ENVELOPE			



Encuentra nuestras redes

