
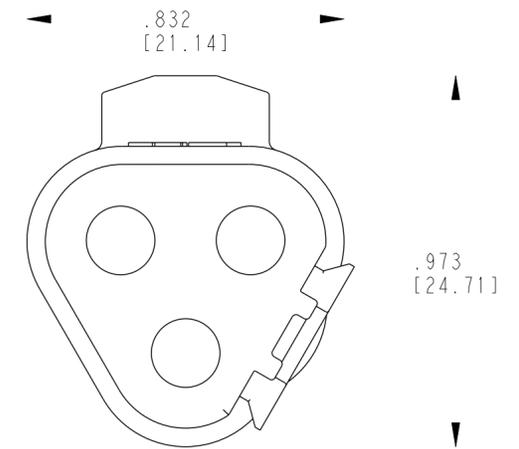
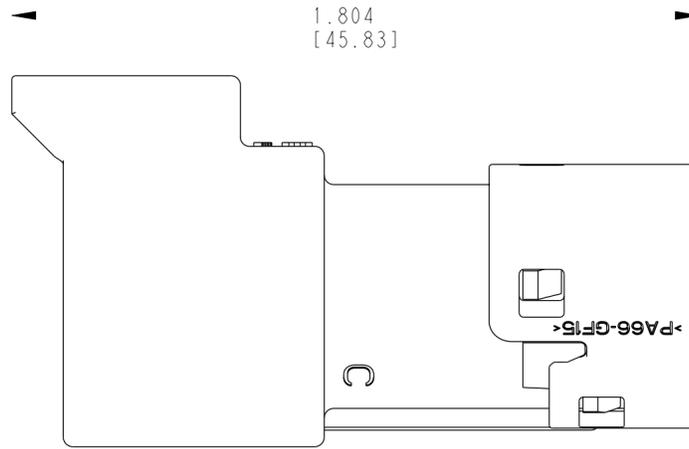
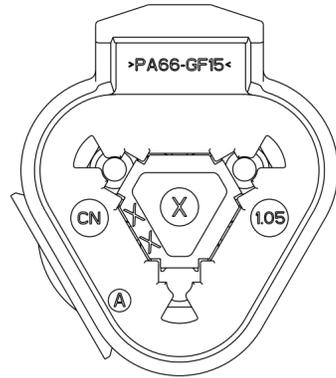
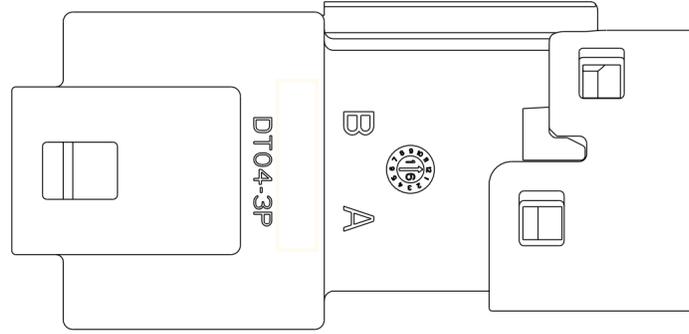


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
B		REVISED PER PCN-23-192205	19APR2024	PS	CB
K		REVISED PER PCN-24-210155	09SEP2024	AJ	CB

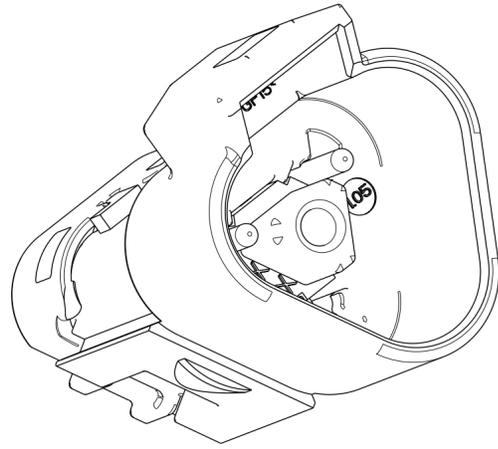

6 MADE IN; CHINA = CN, MEXICO = MX, INDIA = IN.

5 120 Ω RESISTOR IS INSERTED INTO CAVITIES A AND B RESISTOR CHARACTERISTICS: 120Ω ±10%, .4 WATTS MINIMUM.

4 MATERIAL: HOUSING/CAP: PA66 GF15, (GRAY)
 CAP: PA66 GF15, (BLACK)
 GROMMET: VMQ (RED-ORANGE)
 FRONT SEAL: VMQ (RED-ORANGE)
 WEDGE LOCK: PBT GF30 (BLUE)
 PIN TERMINALS: COPPER ALLOY; GOLD PLATED

3. THIS RECEPTACLE MATES WITH THE DT06-3S-XXXX PLUG (XXXX = J1939 ALL MODIFICATIONS). CONSULT FACTORY FOR MODIFICATIONS.

2. FOR CONTACTS AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS SEE ENVELOPE DRAWING 0425-015-0000 AND 0425-017-0000.

1. SECONDARY WEDGE LOCK W3P-1939 IS KEYED AND INCLUDED TO PREVENT MISMATING AND MAY NOT MATE WITH ALL 3 WAY DT SERIES PLUGS.

NOTES:

TE INTERNAL PN	DEUTSCH PN
DT04-3P-P006	DT04-3P-P006

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. THEIS 07JUL1999	TE Co
DIMENSIONS: in [mm]		CHK S. THEIS 08JUL1999	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. READ 13JUL1999	
0 PLC ±	1 PLC ±	PRODUCT SPEC	NAME 3 WAY RECEPTACLE, DT SERIES (TERMINATING RECEPTACLE) -P006 MOD
2 PLC ±	3 PLC ±.025 [0.64]	APPLICATION SPEC	
4 PLC ±	ANGLES ±1°	114-151009	SIZE CAGE CODE DRAWING NO RESTRICTED TO
MATERIAL 4	FINISH -	WEIGHT 9.20g	A2 4AFU8 © DT04-3P-P006
		CUSTOMER DRAWING	SCALE 3:1 SHEET 1 OF 1 REV K