

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

2016


© COPYRIGHT 1999

BY TE CONNECTIVITY

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER PCN-23-192205	11APR2024	PS	CB
	G	REVISED PER PCN-24-210155	09SEP2024	AJ	CB

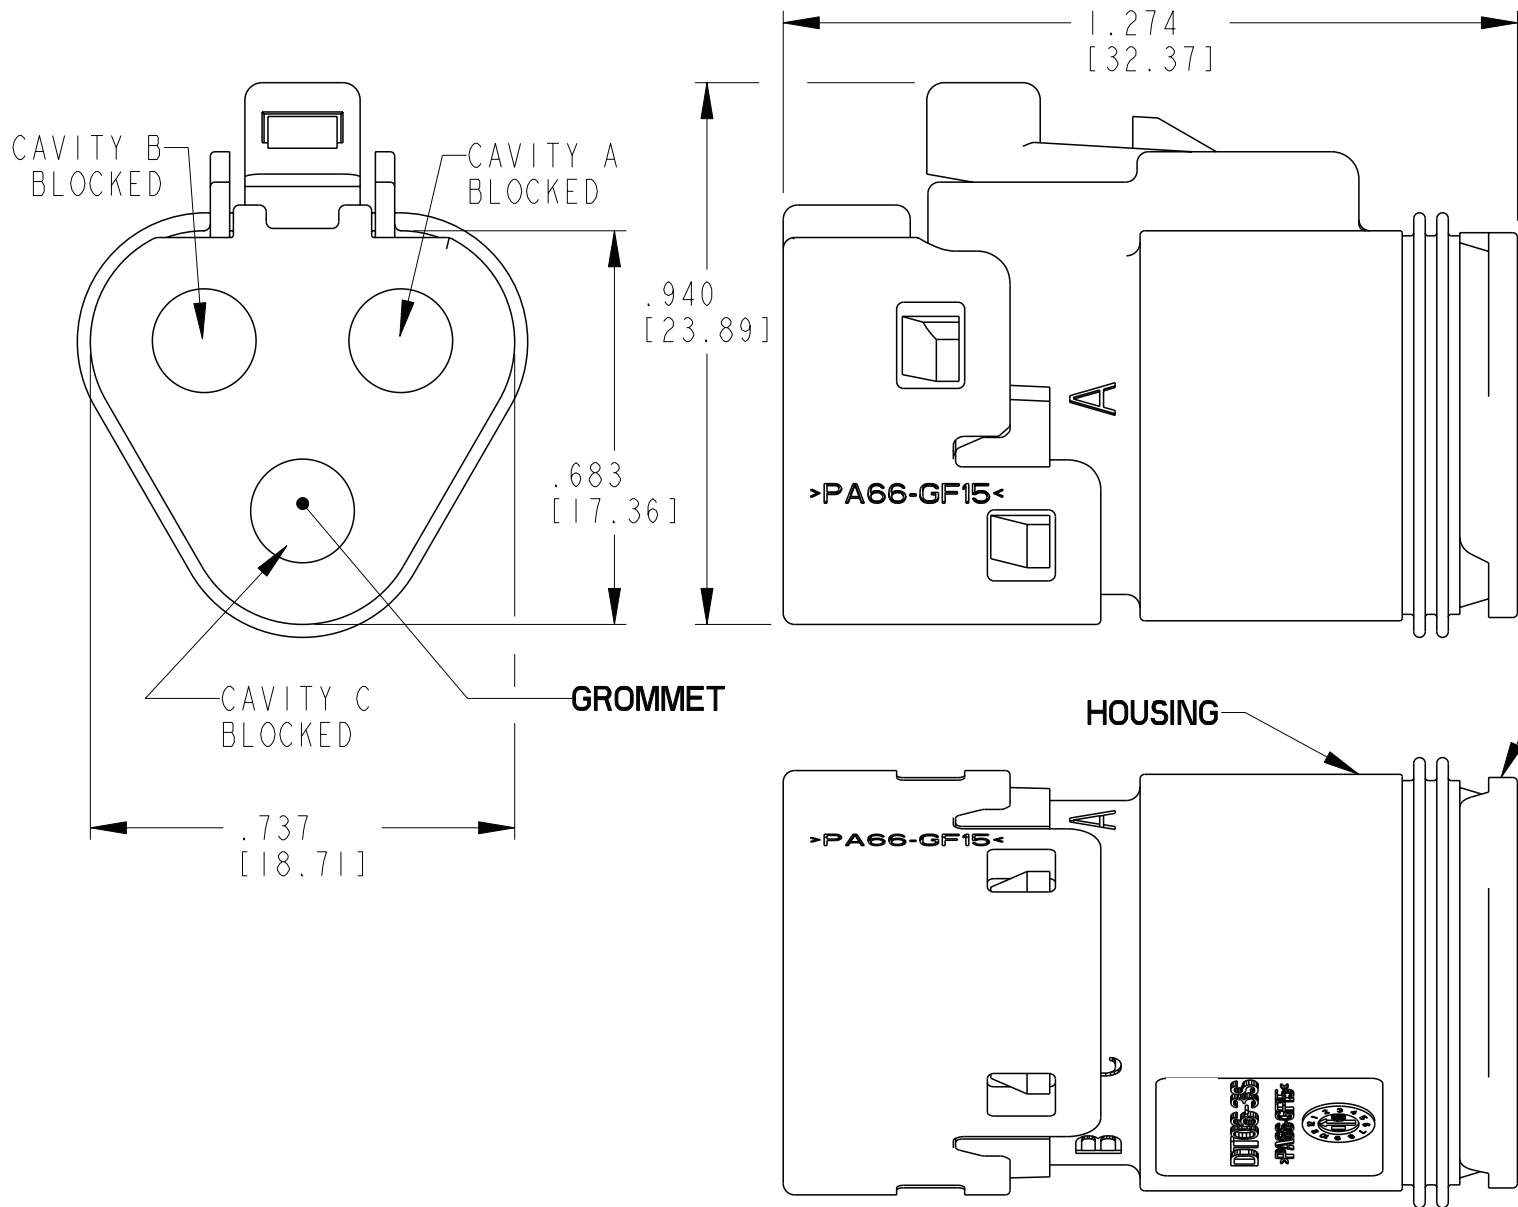

4. RESISTOR CHARACTERISTICS: 120 OHMS $\pm$ 10 PERCENT, .4 WATTS MINIMUM INSERTED INTO CAVITIES A AND B.
3. THIS CONNECTOR CAN PASS THRU A ONE INCH [25.44] HOLE.

2 MATERIAL: HOUSING:PA66 GF15, (GRAY)
CAP: PA66 GF15, (BLACK)
GROMMET: VMQ (RED-ORANGE)
FRONT SEAL: VMQ (RED-ORANGE)
WEDGE LOCK: PBT GF30 (BLUE)
SOCKET TERMINAL: COPPER ALLOY; GOLD PLATED

1. THIS PLUG MATES WITH THE DT04-3P-XXXX RECEPTACLE. (XXXX = J1939 MODIFICATIONS.)
CONSULT FACTORY FOR MODIFICATIONS.
SECONDARY WEDGE LOCK W3S-1939-P012 IS KEYED AND INCLUDED TO PREVENT MISMATING AND MAY NOT MATE WITH ALL 3 WAY DT SERIES RECEPTACLES.

NOTES:

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. THEIS 08JUL1999	TE Connectivity		
DIMENSIONS: in [mm]		CHK V. TOMSA 08MAY2000			
		APVD R. READ 10MAY2000	NAME 3 WAY PLUG DT SERIES (TERMINATING PLUG), P006 MOD		
		PRODUCT SPEC 108-151009			
		APPLICATION SPEC 114-151009	SIZE A3	CAGE CODE 4AFU8	DRAWING NO G-DT06-3S-P006
		WEIGHT 8.00g	RESTRICTED TO -		
MATERIAL 2		FINISH	SCALE 3:1		
			SHEET 1 OF 1		
			REV G		